

RoHS

B_YS-1W Series

1W, FIXED INPUT, ISOLATED & UNREGULATED SINGLE OUTPUT DC-DC CONVERTER

FEATURES

- Efficiency up to 80%
- Miniature SIP Package
- 1KVDC Isolation
- Temperature Range: -40°C ~ +85°C
- Internal SMD Construction
- Industry Standard Pinout
- No Heatsink Required
- No External Component Required
- PCB Mounting
- RoHS Compliance

APPLICATIONS


The B_YS-1W series are specially designed for applications where a single power supply is isolated from the input power supply in a distributed power supply system on a circuit board. These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 10\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple and noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits and IGBT power device driven circuits, etc.

MODEL SELECTION

B2409YS-1W

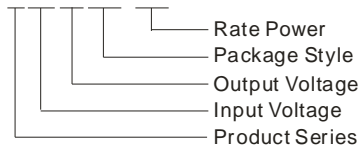

MORNSUN America

43 Broad Street
Hudson, MA 01749
Tel: 978-567-9610
Fax: 978-567-9601
<http://www.mornsunamerica.com>

PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% Typ)
	Voltage (VDC)		Voltage (VDC)	Current (mA)		
	Nominal	Range		Max.	Min.	
B0303YS-1W	3.3	2.97-3.63	3.3	303	30	72
B0305YS-1W			5	200	20	74
B0503YS-1W	5	4.5-5.5	3.3	303	30	72
B0505YS-1W			5	200	20	70
B0509YS-1W			9	111	12	78
B0512YS-1W			12	83	9	79
B0515YS-1W			15	67	7	80
B1203YS-1W			12	10.8-13.2	3.3	303
B1205YS-1W	5	200			20	71
B1209YS-1W	9	111			12	76
B1212YS-1W	12	83			9	78
B1215YS-1W	15	67			7	80
B2405YS-1W	24	21.6-26.4			5	200
B2409YS-1W			9	111	12	78
B2412YS-1W			12	83	9	79
B2415YS-1W			15	67	7	80

Note: The B_YS-W2 series also are available in our company.

ISOLATION SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Units
Isolation voltage	Tested for 1 minute and 1mA max	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

COMMON SPECIFICATIONS



Item	Test Conditions	Min.	Typ.	Max.	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. rise at full load			15	25	
Lead temperature	1.5mm from case for 10 seconds			300	
Short circuit protection*				1	s
Cooling		Free air convection			
Case material		Plastic(UL94-V0)			
MTBF		3500			k hours
Weight			1.6		g

*Supply voltage must be discontinued at the end of short circuit duration.

OUTPUT SPECIFICATIONS					
Item	Test Conditions	Min.	Typ.	Max.	Units
Output power		0.1		1	W
Line regulation	For Vin change of ±1%(3.3V output)			±1.5	
	For Vin change of ±1%(others output)			±1.2	
Load regulation	10% to 100% load (3.3V output)		15	20	%
	10% to 100% load (5V output)		12.8	15	
	10% to 100% load (9V output)		8.3	10	
	10% to 100% load (12V output)		6.8	10	
	10% to 100% load (15V output)		6.3	10	
Output voltage accuracy	See tolerance envelope graph				
Temperature drift	100% full load			±0.03	%/°C
Ripple & Noise*	20MHz Bandwidth		75	100	mVp-p
Switching frequency	Full load, nominal input		100		kHz

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

TYPICAL CHARACTERISTICS

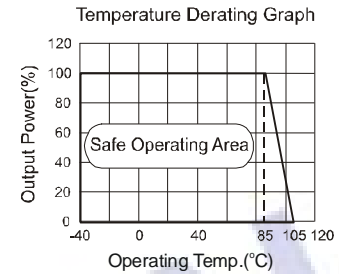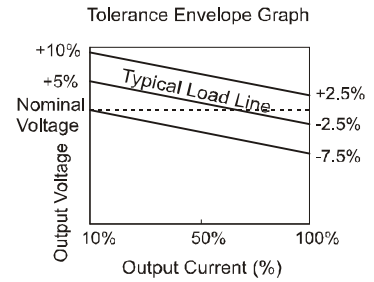

APPLICATION NOTE

1) Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is **not less than 10%** of the full load, and that this product should **never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power (B_YS-W2 Series).

2) Recommended testing and application circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

3) Output Voltage Regulation and Over-voltage Protection Circuit



The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

4) Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

5) No parallel connection or plug and play

RECOMMENDED CIRCUIT

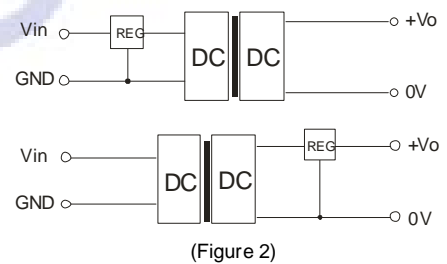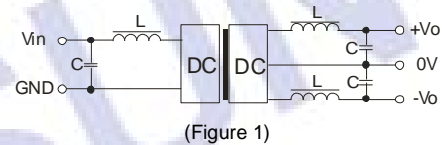


EXTERNAL CAPACITOR TABLE

Vin (VDC)	Cin (μF)	Vout (VDC)	Cout (μF)
3.3/5	4.7	3.3/5	10
12	2.2	9	4.7
24	1	12	2.2
-	-	15	1

It's not recommended to connect any external capacitor in the application field with less than 0.5 watt output.

OUTLINE DIMENSIONS & FOOTPRINT DETAILS

MECHANICAL DIMENSIONS

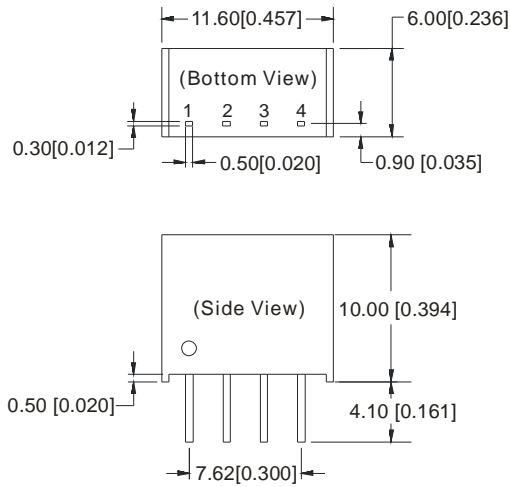


FOOTPRINT DETAILS


Pin	Function
1	Vin
2	GND
3	0V
4	+Vo

Note:
 Unit:mm[inch]
 Pin section tolerances: $\pm 0.10\text{mm} [\pm 0.004\text{inch}]$
 General tolerances: $\pm 0.25\text{mm} [\pm 0.010\text{inch}]$

RECOMMENDED FOOTPRINT(TOP VIEW)

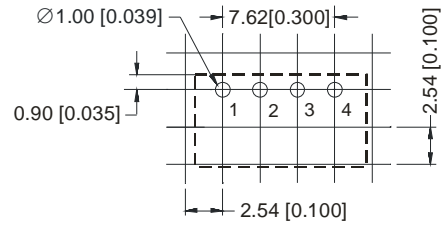

TUBE OUTLINE DIMENSIONS

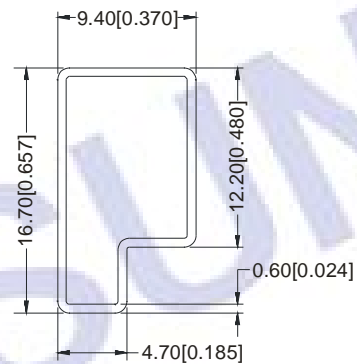

Note:
 Unit :mm[inch]
 General tolerances: $\pm 0.50\text{mm} [\pm 0.020\text{inch}]$
 L=530mm[20.866inch] pcs/tube: 43
 L=220mm[8.661inch] pcs/tube: 17

Note:

1. Operation under minimum load will not damage the converter; However, they may not meet all specification listed.
2. All specifications measured at $T_a=25^\circ\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
3. Only typical models listed, other models may be different, please contact our technical person for more details.
4. In this datasheet, all the test methods of indications are based on corporate standards.